

DHN-66Y18/DG 700~725W

Double Glass PV Module

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001
2018/International standards for occupational health & safety
ISO 14001
2015/Standards for environmental management system
ISO 9001
2015/Quality management system

 15 Material & technology warranty

 30 Linear power output warranty



TOPCon cells double-sided rate up to 85% and more back power generation by 5-20%



Double-glass Technology, higher encapsulation blocking and mechanical strength




Higher performance in anti hidden cracking, acid and alkali, salt spray, water vapor, UV, PID



TOPCon cells, lower attenuation, better temperature coefficient & dim light performance




LECO laser assisted sintering technology, reduces contact resistance and improves efficiency by 0.2% -0.5%

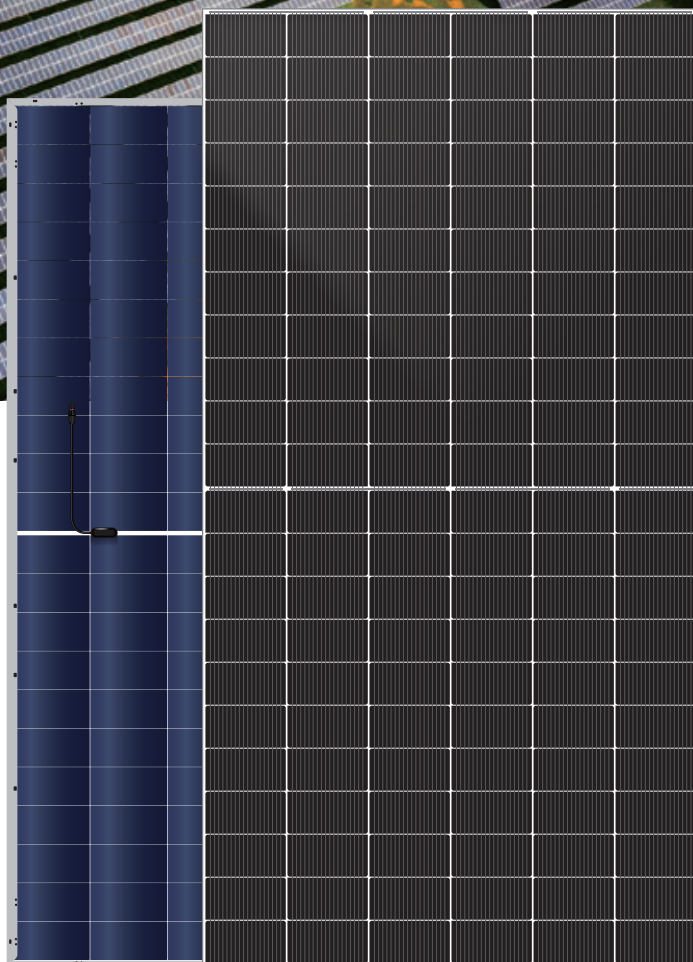


DHN-66Y18/DG 700~725W

Design

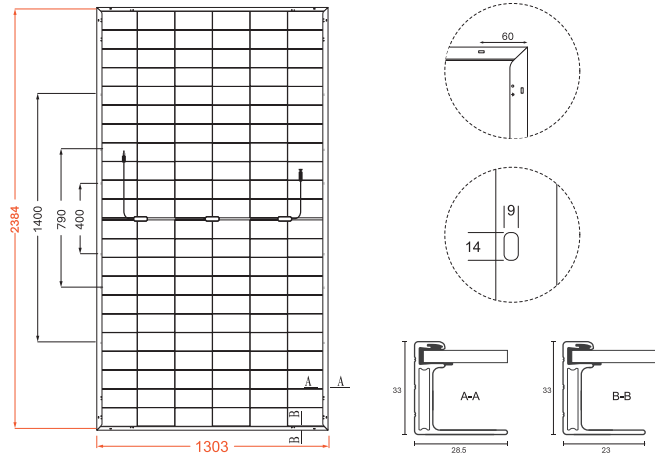

30-Year Linear Power Output Warranty

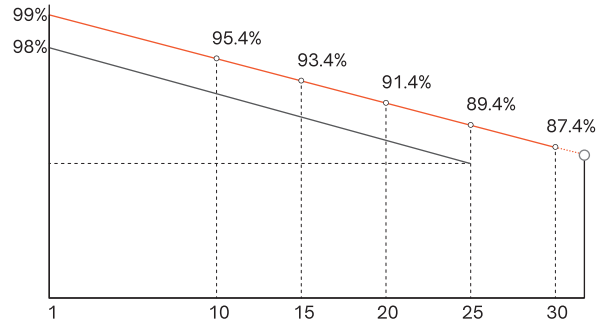

— DAH Solar linear power output guarantee
— Standard linear power output guarantee

Mechanical Specification

No. of Cells	132 (6×22)
Weight	36.7kg
Cells Type	N-type 210×105mm
Dimension (L×W×T)	2384×1303×33mm
Packing	33pcs/Pallet, 594pcs/40HQ

Cable(Including connector)	4.0mm ² , 300/200mm in length, length can be customized
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

Electrical Characteristics

Module Type	DHN-66Y18/DG											
	STC		NOCT		STC		NOCT		STC		NOCT	
Test conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (P _{max} /W)	700	528	705	531	710	535	715	539	720	543	725	546
Open-circuit Voltage (V _{oc} /V)	47.6	45.2	47.8	45.4	48.0	45.6	48.2	45.8	48.4	46.0	48.6	46.2
Maximum Power Voltage (V _{mp} /V)	40.0	38.0	40.2	38.2	40.4	38.4	40.6	38.6	40.8	38.8	41.0	39.0
Short-circuit Current (I _{sc} /A)	18.49	14.93	18.55	14.98	18.61	15.02	18.67	15.07	18.73	15.12	18.79	15.17
Maximum Power Current (I _{mp} /A)	17.50	13.88	17.54	13.91	17.57	13.94	17.61	13.97	17.65	14.00	17.68	14.03
Module Efficiency (STC)	22.53%		22.70%		22.86%		23.02%		23.18%		23.34%	
Refer Bifacial Factor	80±5%											

STC-Standard Test Environment: Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Standard Test Environment: Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Double-Sided Power Generation Parameters (Rear gain)

Gain	Parameter	735	740	746	751	756	761
5%	Maximum Power (P _{max})	735	740	746	751	756	761
	Module Efficiency (%)	23.7	23.8	24.0	24.2	24.3	24.5
10%	Maximum Power (P _{max})	805.0	810.8	816.5	822.3	828.0	833.8
	Module Efficiency (%)	25.9	26.1	26.3	26.5	26.7	26.8
20%	Maximum Power (P _{max})	875.0	881.3	887.5	893.8	900.0	906.3
	Module Efficiency (%)	28.2	28.4	28.6	28.8	29.0	29.2

Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +70°C
Maximum Series Fuse Rating	35A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of I _{sc} (ΔI _{sc})	0.046%/°C
Temperature Coefficient of V _{oc} (βV _{oc})	-0.25%/°C
Temperature Coefficient of P _{max} (γP _{mp})	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa